


Cellyx™ Cylinder 100



Trademark and 2019 ©

Cellyx™ is our range of polyurethane acoustic foam. Acoustic foam is one of the most common used in acoustical treatment to reduce echoes and reverberations. The fire-rated foam density is engineered based on airflow resistive data. Cellyx™ Cylinder baffles improve the quality of sound in large rooms. They can be mounted horizontally or vertically with corkscrew hangers.

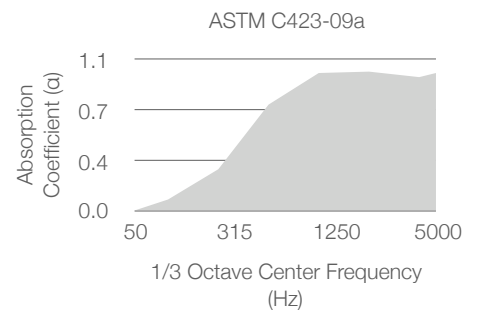

Technical Specifications

Profile	Cylinder
Material	Polyurethane Foam
Standard Height	600mm
Standard Diameter	100mm
Density	25kg/m ³
Finishing	Flocked or Unflocked
Fire-Rated Test	ASTM E84-12a = Class A
Acoustics Test	ASTM C423-09a = NRC 0.77