


Cellyx™ Flat 50



Trademark and 2019 ©

Cellyx™ is our range of polyurethane acoustic foam. Acoustic foam is one of the most common used in acoustical treatment to reduce echoes and reverberations. The fire-rated foam density is engineered based on airflow resistive data. The flat shape provides basic sound absorption for low-high frequencies. Available in thickness of 50mm.

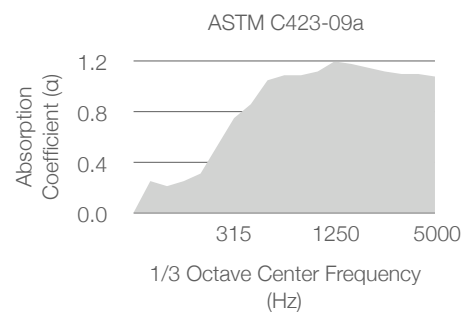

Technical Specifications

Profile	Flat
Material	Polyurethane Foam
Standard Dimension	300mm x 300mm, 600mm x 600mm
Standard Thickness	50mm
Flat Profile	25mm Bevel Width with 25mm Base
Density	25kg/m ³
Finishing	Flocked or Unflocked
Fire-Rated Test	ASTM E84-12a = Class A
Acoustics Test	ASTM C423-09a = NRC 0.96