


# Cellyx™ Cylinder 150



Trademark and 2024 ©

Cellyx™ is our range of polyurethane and melamine acoustic foam. Acoustic foam is one of the most common used in acoustical treatment to reduce echoes and reverberations. The fire-rated foam density is engineered based on airflow resistive data. Cellyx™ Cylinder baffles improve the quality of sound in large rooms. They can be mounted horizontally or vertically with corkscrew hangers.

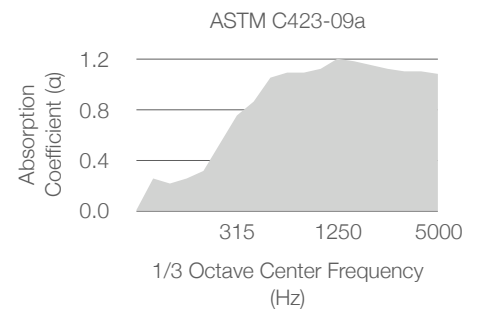

## Technical Specifications

Profile	Cylinder
Material	Polyurethane Foam or Melamine Foam
Standard Height	600mm
Standard Diameter	150mm
Density	25kg/m <sup>3</sup>
Finishing	Flocked or Unflocked
Fire-Rated Test	Polyurethane Foam: ASTM E84-12a = Class A Melamine Foam: EN13501-1 = Class B S1, d0
Acoustics Test	ASTM C423-09a = NRC 0.77