



Cellyx™ Wedge 50

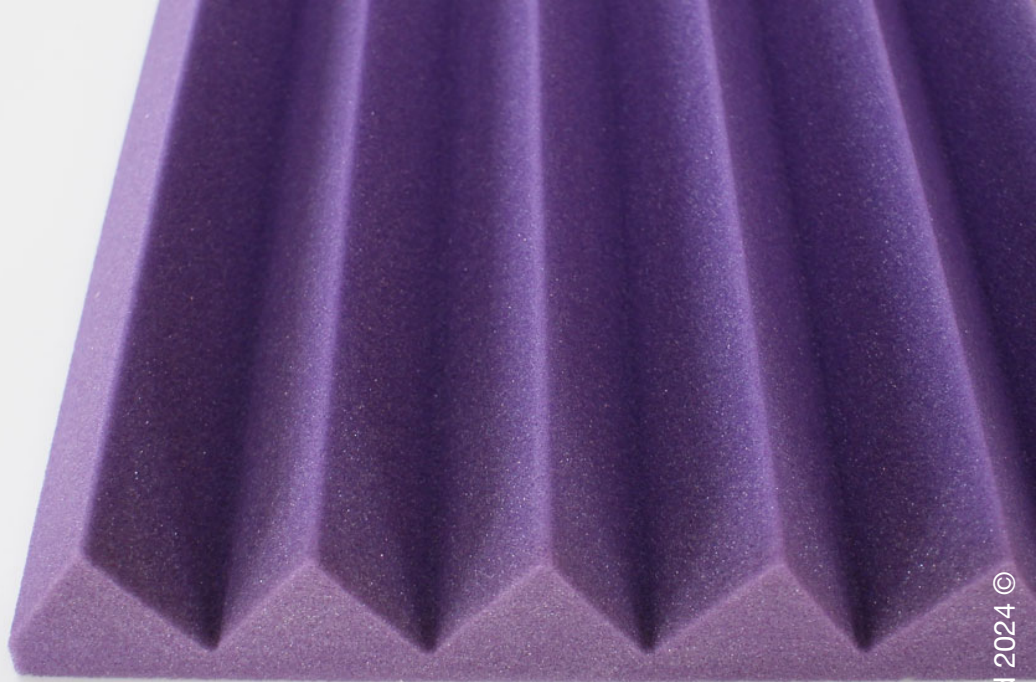

Trademark and 2024 ©

Cellyx™ is our range of polyurethane acoustic foam. Acoustic foam is one of the most common used in acoustical treatment to reduce echoes and reverberations. The fire-rated foam density is engineered based on airflow resistive data. The wedge shape has increased surface area for absorption of mid-high frequencies. The wedge profile comes in 50mmL x 40mmH dimensions. The total thickness is 60mm respectively (inclusive of 10mm base).

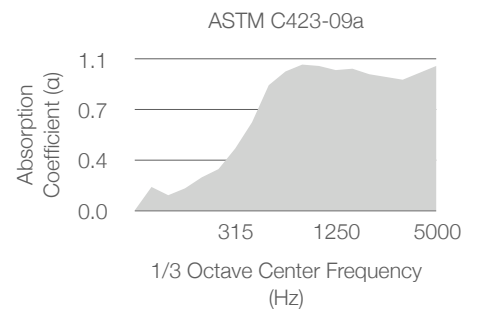

Technical Specifications

Profile	Wedge
Material	Polyurethane Foam
Standard Dimension	600mm x 600mm
Standard Thickness	50mm
Wedge Profile	50mmW x 40mmH with 10mm Base
Density	25kg/m ³
Finishing	Flocked or Unflocked
Fire-Rated Test	ASTM E84-12a = Class A
Acoustics Test	ASTM C423-09a = NRC 0.81